

REV.	DATE	DESCRIPTION	ECO	BY	C'H'K.
B	2018-02-08 08:00:00 EST	UPDATED AS PER MARKUP	48441	MG	RM



Y644-HSXT DIELESS HYPRESS™

- . Dieless system, eliminates the need to purchase and maintain dies.
- . Patented rapid advance pump for faster crimps.
- . Pressure relief "pop-off" valve provides audible indication that crimp is complete.
- . Handle trigger drain for convenient ram retraction.
- . 355° head rotation for versatile tool positioning in tight areas.
- . Easy inspection and positive identification is provided with embossment of the BURNDY® logo with every crimp.
- . Comfort grip handles help ease fatigue with continuous use.
- . Supplied with high impact plastic carrying case.
- . Five year warranty and two years on all tools repaired by an Authorized BURNDY® Tool Repair Center.


SPECIFICATIONS

Output Force : 11 tons (22,000 lbs.)
 Weight : 15 lbs. (5.6 kg)
 Length : 23.2" (589.3 mm)
 Height : 3.00" (76.2 mm)
 Width : 7.04" (178.8 mm)

CONDUCTOR RANGE : #6 - 750kcmil AL
 #4 - 1000 kcmil Cu
 #2 - 777 kcmil Cu flex

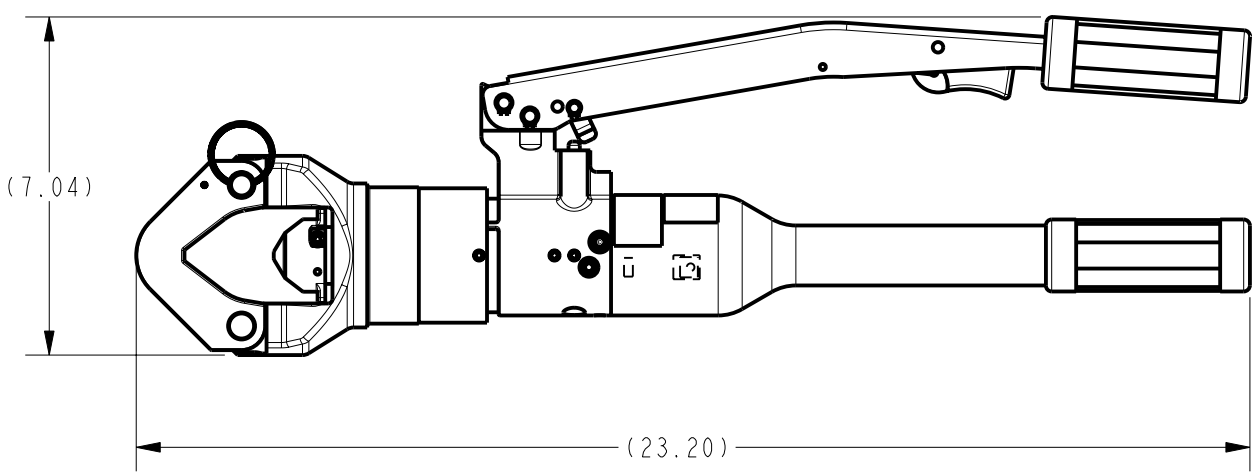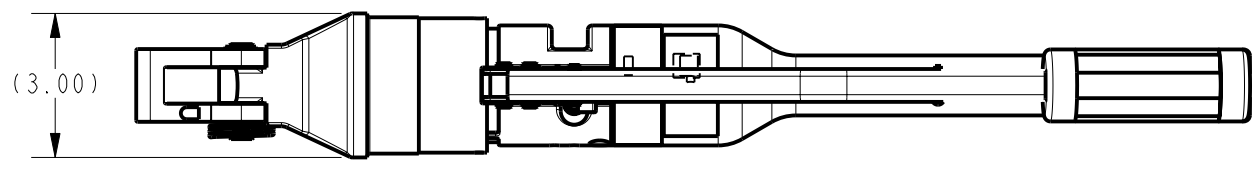

FEATURES

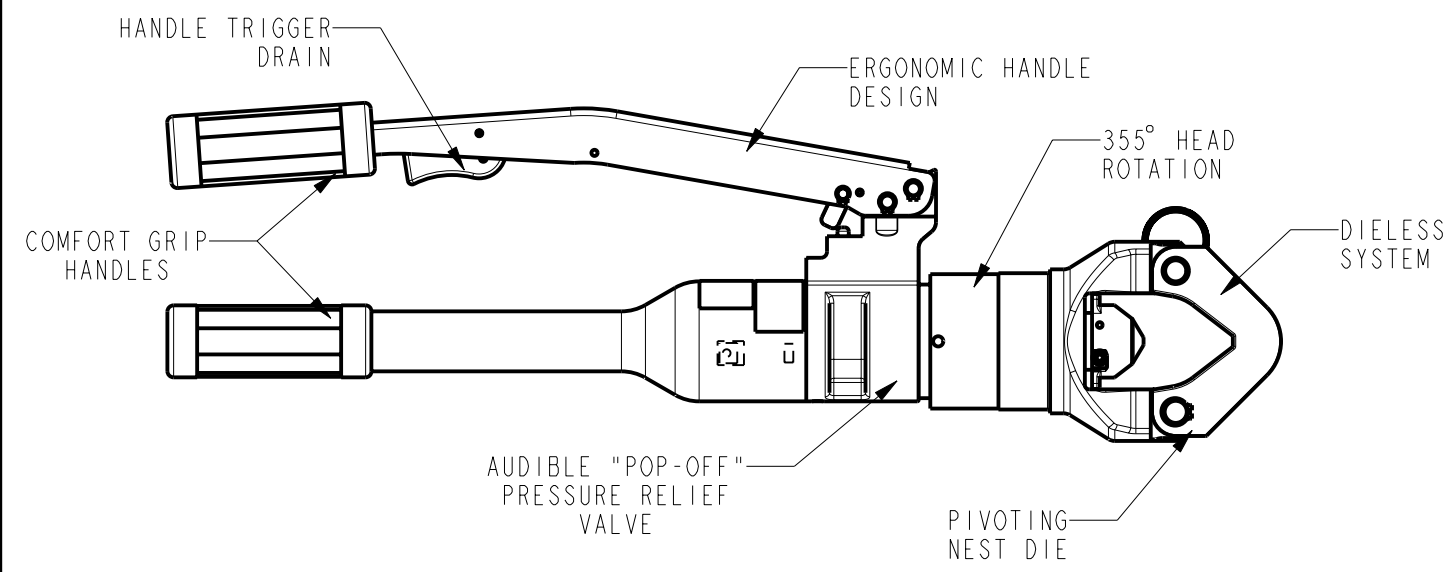

TO ORDER BURNDY® PRODUCTS CALL
 UNITED STATES:
 1-800-346-4175 (LONDONDERRY, NH)
 CANADA:
 1-800-361-6975 (QUEBEC)
 1-800-387-6487 (ALL OTHER PROVINCES)
 FOR PRODUCT INFO: <http://www.burndy.com>

Y644HSXT SELF CONTAINED TOOL			
ITEM NO: 10074289			
CAT. NO: Y644HSXT			
DRAWN BY: T. FAUCHER	04/13/2007		
CHECKER: M. CHIASSON	04/13/2007		
DSN APPVL: J. LEFAVOUR	04/19/2007		
MFG APPVL: --	--		
QA APPVL: J. BRODEUR	04/19/2007		
MKT APPVL: B. POIRIER	05/17/2007	SCALE: 1:4	
PROD FAM: TOOLS, HYDRAULIC		DRAWING NO	REV
PROJECT #: --	SIZE	10074292	B
DOCUMENT TYPE: Sales	B	SHEET 1 OF 1	
REL LEVEL: In Work			

REV: PE0200